Foot pack 952/956 For vehicles with rain gutters and high roofs

952/1060-3 -1

956/1060-32-1 (2 pack)

Must be supplemented with load carrier bars, see the Thule Roof Rack Guide



Components:

Footpack 952: 4 feet + fittings. **Footpack 956:** 2 feet + fittings.

Materials:


Feet in galvanized, powder coated steel plate.

Function:

The feet are positioned in the rain gutters. The brackets grip the rain gutters while the bars are simultaneously fastened in position with the knobs.




- Simple to fit with the help of thumb bolts that secure the feet and the bars in position simultaneously.
- Maximum roof load: 100 kg. Observe the vehicle manufacturer's instructions.
- Patented THULE design.
- No additional protection for rain gutters required as the feet and brackets are coated in Pebax plastic.
- Can be locked with four lockable knobs, Art No: 527.
- Featuring the THULE One Key System.



04/04 Load carriers 3.31

Foot pack 952/956 For vehicles with rain gutters and high roofs

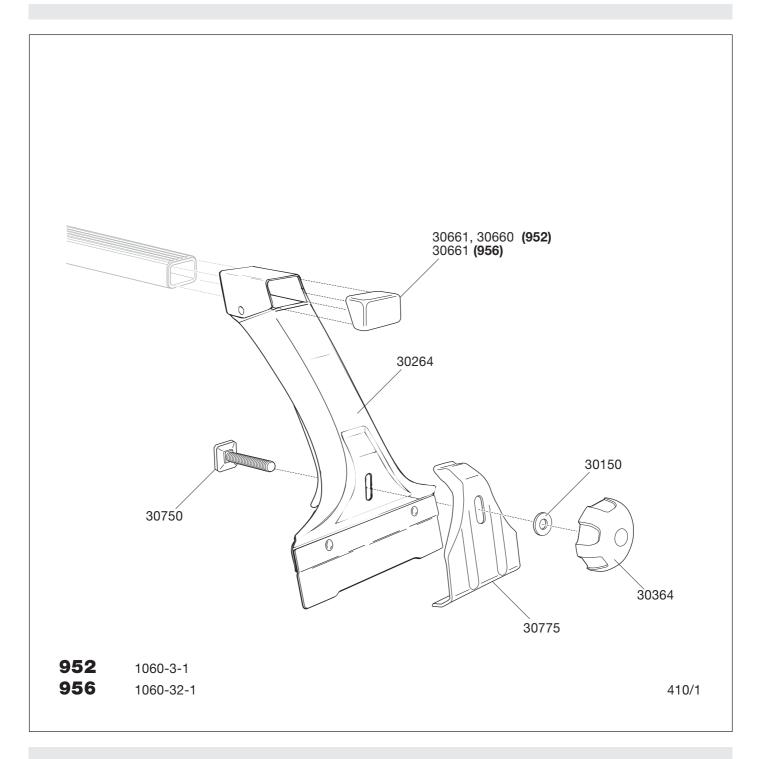

Individual packs

Pallet

Product	EAN	KG	L/W/H in cm
952	7313021060315	3,9	40/26/10
956	7313021063217	2,0	40/15/9

Product	Qty/kg	L/W/H in cm
952	90/357	133/83/113
956	192/395	120/80/120

04/04 Load carriers 3.32